

DURABILITY &
50 YEARS
DEPENDABILITY

Ultra Small Receiver & Transmitter

Larco now offers the most space efficient and durable wireless automatic door control device available when combined with select Larco wall switch assemblies.

The Ultra small receiver operates at 433.92 MHz (acceptable in the United States, Canada, and any European Union member state) and employs code hopping-technology, for secure activations.

The receiver only operates after learning a transmitter's signal through a simple procedure. This programming procedure eliminates the need to set dip switches and involves a simple press of the programming button located on the top cover of the receiver.

Features & Benefits:

- Easy installation and servicing
- Activation of 1.5 seconds up to 4 hours
- Memorize codes from up to 12 different transmitters
- Improved signal range
- Receiver unit offers millions of code variations for increased security and eliminates dipswitch settings
- Comes equipped with a wiring harness
- LED indicator for activation and battery life




Ultra-small 433Mhz Receiver



Larco's two channel key fob transmitter makes programming up to two doors easy



4 1/4" tall x 2 1/4" wide

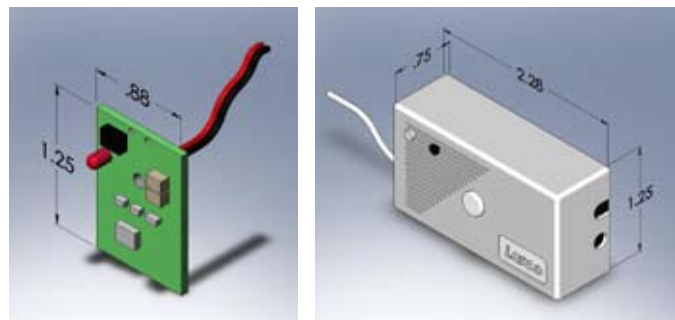

Wall switches available with transmitter

TECHNICAL SPECIFICATIONS:

Transmitter

Frequency	:433.92 MHz
Dimensions	:1.25" x 0.875" x 0.25"
Security Code Method	:Code Hopping
Battery Life	:60,000 cycles
Certifications	:FCC, Industry Canada, CE
Operating Temperature Range	:-4°F to 122°F (-20°C to 55°C)

Receivers

Frequency	:433.92 MHz
Dimensions	:2.25" x 1.25" x 0.75"
Security Code Method	:Code Hopping-Can learn up to 12 different transmitters
Operating Temperature Range	:-4°F to 122°F (-20°C to 55°C)
Electrical Rating	:100,000 cycles at 2 Amps at either 24 VDC or 120 VAC
Input Power	:24 VAC, 24VDC or 12 VAC, 12 VDC
Output	:Two Relay Outputs: 1 NO 1 NC
Certifications	:FCC, Industry Canada, CE

ORDERING INFORMATION:

Transmitters

DESCRIPTION	PART #
Ultra-small 433 MHz replacement transmitter	234475
433 MHz Single channel hand held	234465
433 MHz Dual channel hand held	234467
433 MHz Four channel hand held	234469
433 MHz Dual channel micro hand held	234518

Receivers

DESCRIPTION	PART #
Ultra-small 433MHz receiver (shown)	233804

Common Applications and Components

Common automatic door applications can include presence sensing mats, trim, guide rails, and remote post switch assembly.



Larco offers one of the most complete lines of wall switches on the market. Visit Larco.com or call 800-523-6996 for more information.